


HAYDAY AUTOWRAP




HAYDAY AW1500 *makes round bale wrapping easy*

AW1500 enables the operator to perform the entire operation
- load, wrap, and position the bale -
without leaving the comfort of the tractor seat.

AW 1500 can also pick up, carry, and stack
wrapped bales without damage to the silage film.

HAYDAY AW1500 for efficient fodder conservation

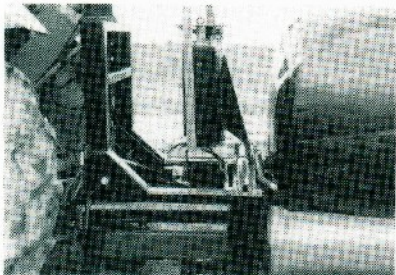

CHARACTERISTICS

The AW1500 can be front mounted to a loader or rear mounted to a tractor three-point linkage. The two remote model requires two double acting hydraulic outlets. The one remote model connects to one single acting hydraulic outlet with tank return.

Two hydraulically driven rollers load, rotate, carry, and position the bale. Pressure compensated hydraulic speed control valves allows the precise control of film overlap essential to achieve a well wrapped bale. Both rollers are driven which assists in the control of deformed or conical bales. A special hydraulic arrangement prevents squeezing of the bale, or scuffing of the film when loading and unloading.

The film pre-stretch device is mounted on a rotating arm in such a way as to allow simple adjustment for a range of bale diameters. At rest the rotating arm is held in position by a hydraulic brake, allowing ease of transportation and facilitating work in hilly terrain. A crossflow relief valve is set for safety in case of accidental contact.

Both models are controlled from the tractor. The two remote model utilises the tractors hydraulic levers, combined with a cable operated selector valve. The one remote model is electro-hydraulically operated by a control box conveniently mounted in the tractor. A wrap counter, standard to both models, takes the guesswork out of wrapping.

At the end of the wrapping process the film is caught and perforated by a hydraulically operated knife/clamp arrangement, leaving the film end clamped in position ready to begin the next bale.

The AW1500 is also equipped with a support roller which allows it to discharge weight during wrapping, thus enabling use by smaller tractors.

SPECIFICATIONS

Weight (approx.)	550 kg
Length	2400 mm
Width	1600 mm
Height	2700 mm
Bale length	up to 1500 mm
Bale diameter	1200mm to 1800mm

For further information please contact :

HAYDAY AUTOWRAP



PO Box 58
Thornleigh NSW 2120
AUSTRALIA

Tel : 02-875 1365
Fax : 02-484 4757

(c) Hayday Pty Ltd 1990